



Specifications

SBA-100 audio system for SMART Board® interactive displays

Model SBA-100

Overview


The SBA-100 audio system for SMART Board® interactive displays is intended for SMART Board interactive displays with front control panels. You can also use the digital volume controls included in the connected computer's operating system.

See smarttech.com/accessories for more information on this product.



Dimensions and weights¹

Dimensions

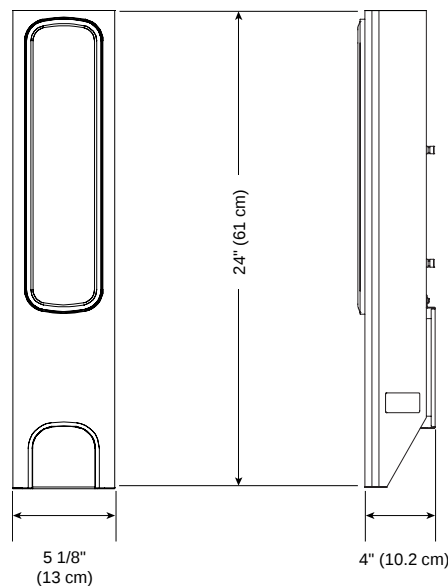

Weight (both speakers)

11 lb. 14 oz. (5.4 kg)

Weight with brackets added

13 lb. 11 oz. (6.2 kg)

Shipping dimensions

12 3/4" × 8" × 26 1/2"


(32.4 cm × 20.3 cm × 67.3 cm)

Shipping weight

18 lb. (8.2 kg)

¹All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

Standard features

Mounting brackets	Mount the speakers to the wall
Color	White matching the interactive display's frame
Frequency range	50 Hz to 20 kHz $\pm$ 6 dB
Output	14 W RMS both channels driven simultaneously Comfortable listening volume in rooms up to 1,000 sq. ft. (93 m ²) in size with a 30-person capacity (subject to room acoustics)
Connection panel (right speaker)	 1. Powered barrel connector (15V DC, 4A), positive center 2. Polarized Molex[®] connector (to the left speaker)² 3. Dual RCA receptacles (to the interactive display)

Storage and operating requirements

Power requirements	Switching power supply (100V–240V AC, 50 Hz–60 Hz, 1.5A) 14' 9 1/8" (4.5 m) country-specific power cord (15V DC, 4000 mA, 60 VA, positive tip)
Operating specifications	41°F to 95°F (5°C to 35°C) with up to 80% humidity, non-condensing ³

Certification and compliance

Regulatory certification	UL (U.S./Canada), CE, FCC, IC, C-Tick
Environmental compliance	
China	EIP
European Union	RoHS, REACH, Packaging and WEEE
U.S.	Packaging and Conflict Minerals

Purchasing information

Order numbers	
SBA-100	SBA-100 audio system for SMART Board interactive displays
Warranty	One-year limited equipment warranty

smarttech.com/support
smarttech.com/contactsupport

© 2017 SMART Technologies ULC. All rights reserved. SMART Board, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. All third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Contents are subject to change without notice. 04/2017.

²A 16 AWG wire is provided with sufficient slack to discreetly route the wire behind the interactive display or along the floor.

³If the speakers are very cold, allow them to warm to room temperature before operation.